EX PARTE OR LATE FILED

Before the DOCKET FILE COPY ORIGINAL Washington D.C. 2005

In the Matter of)		RECEIVED
Advanced Television Systems)		I the Will VIII
and Their Impact upon the)	MM Docket No. 87-268	COT O - MAR
Existing Television Broadcast)		(GT 2 o 1995)
Service)	FEDER	RAL COMMUNICATIONS COMMISSION OFFICE OF SECRETARY

EX PARTE FILING UNITED STATES ADVANCED TELEVISION SYSTEMS COMMITTEE (ATSC)

The United States Advanced Television Systems Committee (hereinafter "ATSC") hereby files an ex parte presentation related to this Docket. An original and nine copies are submitted for the record and for FCC distribution to the Commissioners.

On April 12, 1995 the ATSC approved the "Digital Television Standard for HDTV Transmission" by a vote of 42 to 2. On September 16, 1995 the ATSC revised that Standard to, among other things, include additional (lower) resolutions. That revision was adopted by a vote of 43 to 1. These two actions thus produce the enclosed ATSC Digital Television Standard. This Standard obviously enjoys very broad support from all sectors of the television industry.

This Standard has been submitted to the FCC Advisory Committee on Advanced Television Service for its consideration and official submission to the Commission at a meeting presently scheduled on November 28, 1995.

Respectfully submitted,


United States Advanced Television Systems Committee 1750 K Street NW, Suite 800 Washington, DC 20006

James C. McKinney

Chairman

October 20, 1995

No. of Copies rec'd_ List ABCDE

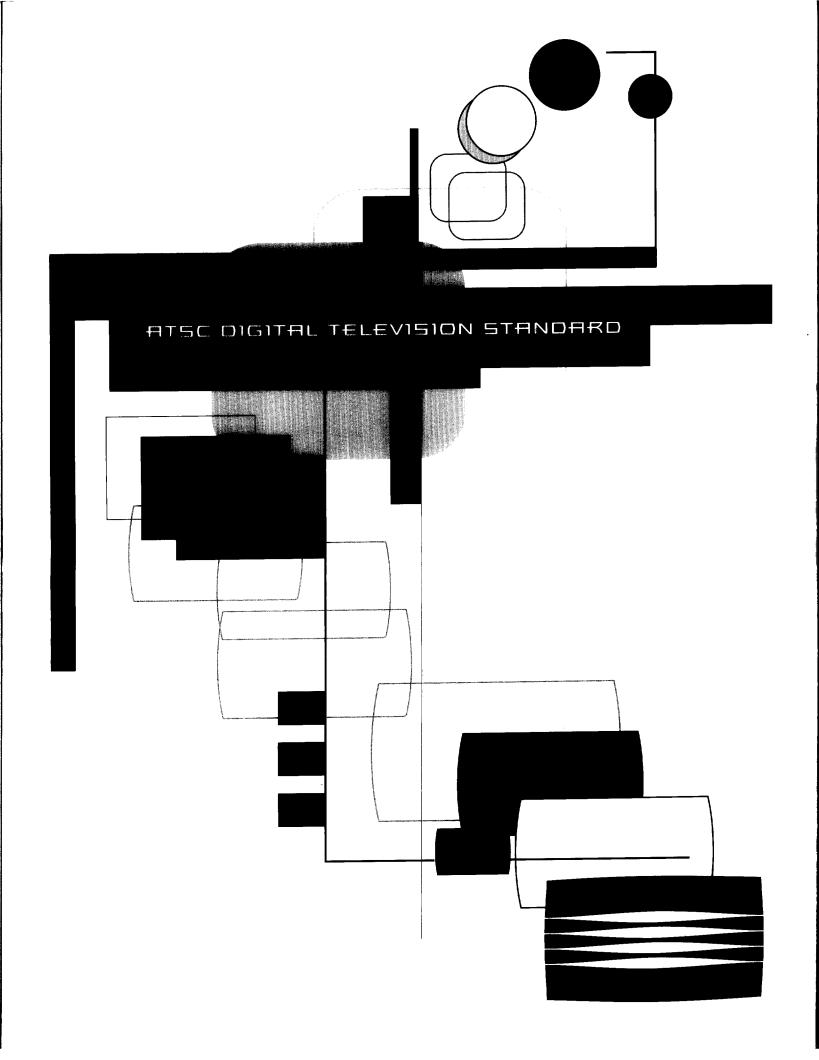

ATSC DIGITAL TELEVISION STANDARD

ADVANCED TELEVISION SYSTEMS COMMITTEE

James C. McKinney, Chairman
Dr. Robert Hopkins, Executive Director

Blank Page

ATSC DIGITAL TELEVISION STANDARD

Table of Contents

LIST OF FIGURES	vi
LIST OF TABLES	vii
FOREWORD	1
1. SCOPE & DOCUMENTATION STRUCTURE	1
1.1 Scope	1
1.2 Documentation structure	1
2. REFERENCES	1
3. DEFINITIONS	2
3.1 Definitions	2
3.2 Compliance notation	2
3.3 Treatment of syntactic elements	2
3.4 Terms employed	2
3.5 Symbols, abbreviations, and mathematical operators	9
3.5.1 Introduction	9 10
3.5.2 Arithmetic operators 3.5.3 Logical operators	10
3.5.4 Relational operators	11
3.5.5 Bitwise operators	11
3.5.6 Assignment	11
3.5.7 Mnemonics	11
3.5.8 Constants	11
3.5.9 Method of describing bit stream syntax	12
3.5.9.1 Definition of bytealigned function	13
3.5.9.2 Definition of next start, code function	13 13
3.5.9.3 Definition of next_start_code function	
4. BACKGROUND	
4.1 Advanced Television Systems Committee (ATSC)	13
4.2 Advisory Committee on Advanced Television Service (ACATS)	14
4.3 Digital HDTV Grand Alliance (Grand Alliance)	15
4.4 Organization for documenting the Digital Television Standard	15
4.5 Principles for documenting the Digital Television Standard	16
5. SYSTEM OVERVIEW	17
5.1 Objectives	17
5.2 System block diagram	18

ANNEX A - VIDEO SYSTEMS CHARACTERISTICS (Normative)	21
1. SCOPE	21
2. REFERENCES	21
2.1 Normative references	21
2.2 Informative references	21
3. COMPLIANCE NOTATION	21
4. POSSIBLE VIDEO INPUTS	21
5. SOURCE CODING SPECIFICATION	22
5.1 Constraints with respect to ISO/IEC 13818-2 Main Profile	22
5.1.1 Sequence header constraints	22
5.1.2 Compression format constraints	23
5.1.3 Sequence extension constraints 5.1.4 Sequence display extension constraints	23 24
5.1.5 Picture header constraints	24
5.2 Bit stream specifications beyond MPEG-2	24
5.2.1 Picture extension and user data syntax	24
5.2.2 Picture user data syntax	25
5.2.3 Picture user data semantics	25
ANNEX B - AUDIO SYSTEMS CHARACTERISTICS (Normative)	
1. SCOPE	27
2. NORMATIVE REFERENCES	27
3. COMPLIANCE NOTATION	27
4. SYSTEM OVERVIEW	27
5. SPECIFICATION	28
5.1 Constraints with respect to ATSC Standard A/52	28
5.2 Sampling frequency	29
5.3 Bit rate	29
5.4 Audio coding modes	29
5.5 Dialogue level	29
5.6 Dynamic range compression	29
. MAIN AND ASSOCIATED SERVICES	30
6.1 Overview	30
6.2 Summary of service types	30
6.3 Complete main audio service (CM)	30
6.4 Main audio service, music and effects (ME)	31
6.5 Visually impaired (VI)	31

6.6 Hearing impaired (HI)	31
6.7 Dialogue (D)	32
6.8 Commentary (C)	32
6.9 Emergency (E)	32
6.10 Voice-over (V0)	33
7. AUDIO ENCODER INTERFACES	33
7.1 Audio encoder input characteristics	33
7.2 Audio encoder output characteristics	33
ANNEX C - SERVICE MULTIPLEX AND TRANSPORT SYSTEMS CHARA	CTERISTICS (Normative)34
1. SCOPE	34
2. NORMATIVE REFERENCES	34
3. COMPLIANCE NOTATION	34
4. SYSTEM OVERVIEW	34
5. SPECIFICATION	36
5.1 MPEG-2 Systems standard	36
5.1.1 Video T-STD	36
5.1.2 Audio T-STD	36
5.2 Registration descriptor	36
5.2.1 Program identifier	36
5.2.2 Audio elementary stream identifier	36
5.3 The program paradigm	37
5.4 Constraints on PSI	37
5.5 PES constraints	38
5.5.1 Video PES constraints	39
5.5.2 Audio PES constraints	39
5.6 Services and features	39
5.6.1 Program guide 5.6.1.1 Master program guide PID	39 39
5.6.1.2 Program guide STD model	40
5.6.2 System information	40
5.6.2.1 System information PID	40
5.6.2.2 System information STD model	40
5.6.3 Specification of private data services 5.6.3.1 Verification model	41
5.6.3.1 Verification model 5.6.3.1.1 Syntax and semantics	41 41
5.6.3.1.2 Ancillary service target decoder (ASTD)	41
5.6.3.2 Stream type and PMT descriptors	41
5.6.3.2.1 Stream type	42
5.6.3.2.2 PMT descriptors	42

5.7 Assignment of identifiers	42
5.7.1 Stream type	42
5.7.2 Descriptors	43
5.7.2.1 AC-3 audio descriptor	43
5.7.2.2 Program smoothing buffer descriptor.	43
5.8 Extensions to the MPEG-2 Systems specification	43
5.8.1 Scrambling control	43
6. FEATURES OF 13818-1 NOT SUPPORTED BY THIS STANDARD	44
6.1 Program streams	44
6.2 Still pictures	44
7. TRANSPORT ENCODER INTERFACES AND BIT RATES	44
7.1 Transport encoder input characteristics	44
7.2 Transport output characteristics	44
ANNEX D - RF/TRANSMISSION SYSTEMS CHARACTERISTICS (Normative)	46
1. SCOPE	46
2. NORMATIVE REFERENCES	46
3. COMPLIANCE NOTATION	46
4. TRANSMISSION CHARACTERISTICS FOR TERRESTRIAL BROADCAST	46
4.1 Overview	46
4.2 Channel error protection and synchronization	48
4.2.1 Prioritization	48
4.2.2 Data randomizer	48
4.2.3 Reed-Solomon encoder	49
4.2.4 Interleaving 4.2.5 Trellis coding	49
4.2.6 Data segment sync	50 54
4.2.7 Data segment sync	54
4.2.7.1 Sync	55
4.2.7.2 PN511	55
4.2.7.3 PN63	55
4.2.7.4 VSB mode	56
4.2.7.5 Reserved	56
4.2.7.6 Precode	57
4.3 Modulation	57
4.3.1 Bit-to-symbol mapping	57
4.3.2 Pilot addition	57
4.3.3 8 VSB modulation method	57

5. TRANSMISSION CHARACTERISTICS FOR HIGH DATA RATE MODE	57
5.1 Overview	57
5.2 Channel error protection and synchronization	59
5.2.1 Prioritization	59
5.2.2 Data randomizer	59
5.2.3 Reed-Solomon encoder	59
5.2.4 Interleaving	59
5.2.5 Data segment sync	60
5.2.6 Data field sync	60
5.3 Modulation	60
5.3.1 Bit-to-symbol mapping	60
5.3.2 Pilot addition	60
5.3.3 16 VSB modulation method	60
ANNEX E - RECEIVER CHARACTERISTICS (INFORMATIVE)	61
1. SCOPE	61
2. REFERENCES TO EXISTING OR EMERGING STANDARDS	61
3. COMPLIANCE NOTATION	61
4. STATUS OF RECEIVER STANDARDIZATION ACTIVITIES	62
4.1 Tuner performance	62
4.1.1 Noise figure	62
4.1.2 Channelization plan for broadcast and cable	62
4.1.3 Direct pickup	62
4.2 Transport	62
4.3 Decoder interface	62
4.4 Digital data interface	62
4.5 Conditional access interface	63
4.6 Closed captioning	63
5. RECEIVER FUNCTIONALITY	63
5.1 Video	63
5.2 Audio	63

List of Figures

Figure 5.1. ITU-R digital terrestrial television broadcasting model.	18
Figure 5.2. High level view of encoding equipment.	19
ANNEX A	
None	
ANNEX B	
Figure 1. Audio subsystem in the digital television system.	28
ANNEX C	
Figure 1. Sample organization of functionality in a transmitter-receiver pair for a single program.	35
Figure 2. Ancillary service target decoder.	42
ANNEX D	
Figure 1. VSB transmitter.	47
Figure 2. VSB data frame.	47
Figure 3. VSB channel occupancy (nominal).	48
Figure 4. Randomizer polynomial.	49
Figure 5. Reed-Solomon (207,187) t=10 parity generator polynomial.	50
Figure 6. Convolutional interleaver (byte shift register illustration).	50
Figure 7. 8 VSB trellis encoder, precoder, and symbol mapper.	51
Figure 8. Trellis code interleaver.	52
Figure 9. 8 VSB data segment.	54
Figure 10. VSB data field sync.	55
Figure 11. Field sync PN sequence generators.	56
Figure 12. Nominal VSB system channel response (linear phase raised cosine Nyquist filter).	58
Figure 13. 16 VSB data segment.	58
Figure 14. 16 VSB transmitter.	59
Figure 15. 16 VSB mapper.	59

ANNEX E

None

4.7	200
Δ.	

None

List of Tables

Table 3.1 Next Start Code	13
ANNEX A	
Table 1 Standardized Video Input Formats	22
Table 2 Sequence Header Constraints	22
Table 3 Compression Format Constraints	23
Table 4 Sequence Extension Constraints	23
Table 5 Sequence Display Extension Constraints	24
Table 6 Picture Extension and User Data Syntax	24
Table 7 Picture User Data Syntax	25
ANNEX B	
Table 1 Audio Constraints	28
Table 2 Audio Service Types	30
ANNEX C	
Table 1 PID Assignment for the Constituent Elementary Streams of a Program	37
Table 2 Transport Scrambling Control Field	43
ANNEX D	
Table 1 Interleaving Sequence	52
Table 2 Byte to Symbol Conversion, Multiplexing of Trellis Encoders	53
ANNEX E	

Blank Page

ATSC DIGITAL TELEVISION STANDARD

FOREWORD

This Standard was prepared by the Advanced Television Systems Committee (ATSC) Technology Group on Distribution (T3). The document was approved by the members of T3 on February 23, 1995 for submission by letter ballot to the membership of the full ATSC as an ATSC Standard. The document was approved by the Members of the ATSC on April 12, 1995. Changes to Annex A, to include standard definition video formats, were approved by the members of T3 on August 4, 1995 and by the Members of the ATSC on September 15, 1995.

This Standard consists of a cover document which provides background information and an overview of the digital television system defined by the Standard. The system consists of various subsystems that are described in the annexes.

1. SCOPE & DOCUMENTATION STRUCTURE

1.1 Scope

The Digital Television Standard describes the system characteristics of the U. S. advanced television (ATV) system. The document and its normative annexes provide detailed specification of the parameters of the system including the video encoder input scanning formats and the pre-processing and compression parameters of the video encoder, the audio encoder input signal format and the pre-processing and compression parameters of the audio encoder, the service multiplex and transport layer characteristics and normative specifications, and the VSB RF/Transmission subsystem.

1.2 Documentation structure

The documentation of the Digital Television Standard consists of this document which provides a general system overview, a list of reference documents, and sections relating to the system as a whole. The system is modular in concept and the specifications for each of the modules are provided in the appropriate annex.

2. REFERENCES

Normative references may be found in each normative Annex. The Digital Television Standard is based on the ISO/IEC MPEG-2 Video Standard, the Digital Audio Compression (AC-3) Standard, and the ISO/IEC MPEG-2 Systems Standard. Those references are listed

NOTE: The user's attention is called to the possibility that compliance with this standard may require use of an invention covered by patent rights. By publication of this standard, no position is taken with respect to the validity of this claim, or of any patent rights in connection therewith. The patent holder has, however, filed a statement of willingness to grant a license under these rights on reasonable and nondiscriminatory terms and conditions to applicants desiring to obtain such a license. Details may be obtained from the publisher.

here for the convenience of the reader. In addition, a guide to the use of the Digital Television Standard is listed.

ATSC Standard A/52 (1995), Digital Audio Compression (AC-3).

ATSC Document A/54 (1995), Guide to the Use of the ATSC Digital Television Standard.

ISO/IEC IS 13818-1, International Standard (1994), MPEG-2 Systems.

ISO/IEC IS 13818-2, International Standard (1994), MPEG-2 Video.

3. DEFINITIONS

3.1 Definitions

With respect to definition of terms, abbreviations and units, the practice of the Institute of Electrical and Electronics Engineers (IEEE) as outlined in the Institute's published standards shall be used. Where an abbreviation is not covered by IEEE practice, or industry practice differs from IEEE practice, then the abbreviation in question will be described in Section 3.4 of this document. Many of the definitions included therein are derived from definitions adopted by MPEG.

3.2 Compliance notation

As used in this document, "shall" or "will" denotes a mandatory provision of the standard. "Should" denotes a provision that is recommended but not mandatory. "May" denotes a feature whose presence does not preclude compliance, that may or may not be present at the option of the implementor.

3.3 Treatment of syntactic elements

This document contains symbolic references to syntactic elements used in the audio, video, and transport coding subsystems. These references are typographically distinguished by the use of a different font (e.g., restricted), may contain the underscore character (e.g., sequence_end_code) and may consist of character strings that are not English words (e.g., dynrng).

3.4 Terms employed

For the purposes of the Digital Television Standard, the following definition of terms apply:

ACATS: Advisory Committee on Advanced Television Service.

access unit: A coded representation of a presentation unit. In the case of audio, an access unit is the coded representation of an audio frame. In the case of video, an access unit includes all the coded data for a picture, and any stuffing that follows it, up to but not including the start of the next access unit. If a picture is not preceded by a group_start_code or a sequence_header_code, the access unit begins with a the picture start code. If a picture is preceded by a group_start_code and/or a sequence_header_code, the access unit begins with

the first byte of the first of these start codes. If it is the last picture preceding a sequence_end_code in the bit stream all bytes between the last byte of the coded picture and the sequence_end_code (including the sequence_end_code) belong to the access unit.

A/D: Analog to digital converter.

AES: Audio Engineering Society.

anchor frame: A video frame that is used for prediction. I-frames and P-frames are generally used as anchor frames, but B-frames are never anchor frames.

ANSI: American National Standards Institute.

Asynchronous Transfer Mode (ATM): A digital signal protocol for efficient transport of both constant-rate and bursty information in broadband digital networks. The ATM digital stream consists of fixed-length packets called "cells," each containing 53 8-bit bytes—a 5-byte header and a 48-byte information payload.

ATEL: Advanced Television Evaluation Laboratory.

ATM: See asynchronous transfer mode.

ATTC: Advanced Television Test Center.

ATV: The U. S. advanced television system.

bidirectional pictures or B-pictures or B-frames: Pictures that use both future and past pictures as a reference. This technique is termed bidirectional prediction. B-pictures provide the most compression. B-pictures do not propagate coding errors as they are never used as a reference.

bit rate: The rate at which the compressed bit stream is delivered from the channel to the input of a decoder.

block: A block is an 8-by-8 array of pel values or DCT coefficients representing luminance or chrominance information.

bps: Bits per second.

byte-aligned: A bit in a coded bit stream is byte-aligned if its position is a multiple of 8-bits from the first bit in the stream.

CDTV: See conventional definition television.

channel: A digital medium that stores or transports a digital television stream.

coded representation: A data element as represented in its encoded form.

compression: Reduction in the number of bits used to represent an item of data.

constant bit rate: Operation where the bit rate is constant from start to finish of the compressed bit stream.

conventional definition television (CDTV): This term is used to signify the analog NTSC television system as defined in ITU-R Recommendation 470. See also standard definition television and ITU-R Recommendation 1125.

CRC: The cyclic redundancy check to verify the correctness of the data.

D-frame: Frame coded according to an MPEG-1 mode which uses DC coefficients only.

data element: An item of data as represented before encoding and after decoding.

DCT: See discrete cosine transform.

decoded stream: The decoded reconstruction of a compressed bit stream.

decoder: An embodiment of a decoding process.

decoding (process): The process defined in the Digital Television Standard that reads an input coded bit stream and outputs decoded pictures or audio samples.

decoding time-stamp (DTS): A field that may be present in a PES packet header that indicates the time that an access unit is decoded in the system target decoder.

digital storage media (DSM): A digital storage or transmission device or system.

discrete cosine transform: A mathematical transform that can be perfectly undone and which is useful in image compression.

DSM-CC: Digital storage media command and control.

DSM: Digital storage media.

DTS: See decoding time-stamp.

DVCR: Digital video cassette recorder

ECM: See entitlement control message.

editing: A process by which one or more compressed bit streams are manipulated to produce a new compressed bit stream. Conforming edited bit streams are understood to meet the requirements defined in the Digital Television Standard.

elementary stream (ES): A generic term for one of the coded video, coded audio or other coded bit streams. One elementary stream is carried in a sequence of PES packets with one and only one stream_id.

elementary stream clock reference (ESCR): A time stamp in the PES Stream from which decoders of PES streams may derive timing.

EMM: See entitlement management message.

encoder: An embodiment of an encoding process.

encoding (process): A process that reads a stream of input pictures or audio samples and produces a valid coded bit stream as defined in the Digital Television Standard.

entitlement control message (ECM): Entitlement control messages are private conditional access information which specify control words and possibly other stream-specific, scrambling, and/or control parameters.

entitlement management message (EMM): Entitlement management messages are private conditional access information which specify the authorization level or the services of specific decoders. They may be addressed to single decoders or groups of decoders.

entropy coding: Variable length lossless coding of the digital representation of a signal to reduce redundancy.

entry point: Refers to a point in a coded bit stream after which a decoder can become properly initialized and commence syntactically correct decoding. The first transmitted picture after an entry point is either an I-picture or a P-picture. If the first transmitted picture is not an I-picture, the decoder may produce one or more pictures during acquisition.

ES: See elementary stream.

ESCR: See elementary stream clock reference.

event: An event is defined as a collection of elementary streams with a common time base, an associated start time, and an associated end time.

field: For an interlaced video signal, a "field" is the assembly of alternate lines of a frame. Therefore, an interlaced frame is composed of two fields, a top field and a bottom field.

forbidden: This term, when used in clauses defining the coded bit stream, indicates that the value shall never be used. This is usually to avoid emulation of start codes.

FPLL: Frequency and phase locked loop.

frame: A frame contains lines of spatial information of a video signal. For progressive video, these lines contain samples starting from one time instant and continuing through successive lines to the bottom of the frame. For interlaced video a frame consists of two fields, a top field and a bottom field. One of these fields will commence one field later than the other.

GOP: See group of pictures.

Group of pictures (GOP): A group of pictures consists of one or more pictures in sequence.

HDTV: See high definition television.

high definition television (HDTV): High definition television has a resolution of approximately twice that of conventional television in both the horizontal (H) and vertical (V) dimensions and a picture aspect ratio (HxV) of 16:9. ITU-R Recommendation 1125 further defines "HDTV quality" as the delivery of a television picture which is subjectively identical with the interlaced HDTV studio standard.

high level: A range of allowed picture parameters defined by the MPEG-2 video coding specification which corresponds to high definition television.

Huffman coding: A type of source coding that uses codes of different lengths to represent symbols which have unequal likelihood of occurrence.

IEC: International Electrotechnical Commission.

intra-coded pictures or I-pictures or I-frames: Pictures that are coded using information present only in the picture itself and not depending on information from other pictures. I-pictures provide a mechanism for random access into the compressed video data. I-pictures employ transform coding of the pel blocks and provide only moderate compression.

ISO: International Organization for Standardization.

ITU: International Telecommunication Union.

JEC: Joint Engineering Committee of EIA and NCTA.

layer: One of the levels in the data hierarchy of the video and system specification.

level: A range of allowed picture parameters and combinations of picture parameters.

macroblock: In the advanced television system a macroblock consists of four blocks of luminance and one each Cr and Cb block.

main level: A range of allowed picture parameters defined by the MPEG-2 video coding specification with maximum resolution equivalent to ITU-R Recommendation 601.

main profile: A subset of the syntax of the MPEG-2 video coding specification that is expected to be supported over a large range of applications.

Mbps: 1,000,000 bits per second.

motion vector: A pair of numbers which represent the vertical and horizontal displacement of a region of a reference picture for prediction.

MP@HL: Main profile at high level.

MP@ML: Main profile at main level.

MPEG: Refers to standards developed by the ISO/IEC JTC1/SC29 WG11, Moving Picture Experts Group. MPEG may also refer to the Group.

MPEG-1: Refers to ISO/IEC standards 11172-1 (Systems), 11172-2 (Video), 11172-3 (Audio), 11172-4 (Compliance Testing), and 11172-5 (Technical Report).

MPEG-2: Refers to ISO/IEC standards 13818-1 (Systems), 13818-2 (Video), 13818-3 (Audio), 13818-4 (Compliance).

pack: A pack consists of a pack header followed by zero or more packets. It is a layer in the system coding syntax.

packet data: Contiguous bytes of data from an elementary data stream present in the packet.

packet identifier (PID): A unique integer value used to associate elementary streams of a program in a single or multi-program transport stream.

packet: A packet consists of a header followed by a number of contiguous bytes from an elementary data stream. It is a layer in the system coding syntax.

padding: A method to adjust the average length of an audio frame in time to the duration of the corresponding PCM samples, by continuously adding a slot to the audio frame.

payload: Payload refers to the bytes which follow the header byte in a packet. For example, the payload of a transport stream packet includes the PES_packet_header and its PES_packet_data_bytes or pointer_field and PSI sections, or private data. A PES_packet_payload, however, consists only of PES_packet_data_bytes. The transport stream packet header and adaptation fields are not payload.

PCR: See program clock reference.

pel: See pixel.

PES packet header: The leading fields in a PES packet up to but not including the PES_packet_data_byte fields where the stream is not a padding stream. In the case of a padding stream, the PES packet header is defined as the leading fields in a PES packet up to but not including the padding_byte fields.

PES packet: The data structure used to carry elementary stream data. It consists of a packet header followed by PES packet payload.

PES Stream: A PES stream consists of PES packets, all of whose payloads consist of data from a single elementary stream, and all of which have the same stream_id.

PES: An abbreviation for packetized elementary stream.

picture: Source, coded or reconstructed image data. A source or reconstructed picture consists of three rectangular matrices representing the luminance and two chrominance signals.

PID: See packet identifier.

pixel: "Picture element" or "pel." A pixel is a digital sample of the color intensity values of a picture at a single point.

predicted pictures or P-pictures or P-frames: Pictures that are coded with respect to the nearest previous I or P-picture. This technique is termed forward prediction. P-pictures provide more compression than I-pictures and serve as a reference for future P-pictures or B-pictures. P-pictures can propagate coding errors when P-pictures (or B-pictures) are predicted from prior P-pictures where the prediction is flawed.

presentation time-stamp (PTS): A field that may be present in a PES packet header that indicates the time that a presentation unit is presented in the system target decoder.

presentation unit (PU): A decoded audio access unit or a decoded picture.

profile: A defined subset of the syntax specified in the MPEG-2 video coding specification

program clock reference (PCR): A time stamp in the transport stream from which decoder timing is derived.

program element: A generic term for one of the elementary streams or other data streams that may be included in the program.

program specific information (PSI): PSI consists of normative data which is necessary for the demultiplexing of transport streams and the successful regeneration of programs.

program: A program is a collection of program elements. Program elements may be elementary streams. Program elements need not have any defined time base; those that do have a common time base and are intended for synchronized presentation.

PSI: See program specific information.

PTS: See presentation time-stamp.

PU: See presentation unit.

quantizer: A processing step which intentionally reduces the precision of DCT coefficients

random access: The process of beginning to read and decode the coded bit stream at an arbitrary point.

reserved: This term, when used in clauses defining the coded bit stream, indicates that the value may be used in the future for Digital Television Standard extensions. Unless otherwise specified within this Standard, all reserved bits shall be set to "1".

SCR: See system clock reference.

scrambling: The alteration of the characteristics of a video, audio or coded data stream in order to prevent unauthorized reception of the information in a clear form. This alteration is a specified process under the control of a conditional access system.

SDTV: See standard definition television.

slice: A series of consecutive macroblocks.

SMPTE: Society of Motion Picture and Television Engineers.

source stream: A single, non-multiplexed stream of samples before compression coding.

splicing: The concatenation performed on the system level or two different elementary streams. It is understood that the resulting stream must conform totally to the Digital Television Standard.

standard definition television (SDTV): This term is used to signify a digital television system in which the quality is approximately equivalent to that of NTSC. This equivalent quality may be achieved from pictures sourced at the 4:2:2 level of ITU-R Recommendation 601 and subjected to processing as part of the bit rate compression. The results should be such that when judged across a representative sample of program material, subjective equivalence with NTSC is achieved. Also called standard digital television. See also conventional definition television and ITU-R Recommendation 1125.

start codes: 32-bit codes embedded in the coded bit stream that are unique. They are used for several purposes including identifying some of the layers in the coding syntax. Start codes consist of a 24 bit prefix (0x000001) and an 8 bit stream id.

STD input buffer: A first-in, first-out buffer at the input of a system target decoder for storage of compressed data from elementary streams before decoding.

STD: See system target decoder.

still picture: A coded still picture consists of a video sequence containing exactly one coded picture which is intra-coded. This picture has an associated PTS and the presentation time of succeeding pictures, if any, is later than that of the still picture by at least two picture periods.

system clock reference (SCR): A time stamp in the program stream from which decoder timing is derived.

system header: The system header is a data structure that carries information summarizing the system characteristics of the Digital Television Standard multiplexed bit stream.

system target decoder (STD): A hypothetical reference model of a decoding process used to describe the semantics of the Digital Television Standard multiplexed bit stream.

time-stamp: A term that indicates the time of a specific action such as the arrival of a byte or the presentation of a presentation unit.

TOV: Threshold of visibility.

Transport Stream packet header: The leading fields in a Transport Stream packet up to and including the continuity_counter field.

variable bit rate: Operation where the bit rate varies with time during the decoding of a compressed bit stream.

VBV: See video buffering verifier.

Video buffering verifier (VBV): A hypothetical decoder that is conceptually connected to the output of an encoder. Its purpose is to provide a constraint on the variability of the data rate that an encoder can produce.

video sequence: A video sequence is represented by a sequence header, one or more groups of pictures, and an end_of_sequence code in the data stream.

8 VSB: Vestigial sideband modulation with 8 discrete amplitude levels.

16 VSB: Vestigial sideband modulation with 16 discrete amplitude levels.

3.5 Symbols, abbreviations, and mathematical operators

3.5.1 Introduction

The symbols, abbreviations, and mathematical operators used to describe the Digital Television Standard are those adopted for use in describing MPEG-2 and are similar to those used in the "C" programming language. However, integer division with truncation and rounding are specifically defined. The bitwise operators are defined

assuming two's-complement representation of integers. Numbering and counting loops generally begin from 0.

3.5.2 Arithmetic operators

+ Addition.

- Subtraction (as a binary operator) or negation (as a unary operator).

++ Increment.

- - Decrement.

* or × Multiplication.

^ Power.

Integer division with truncation of the result toward 0. For example, 7/4 and -7/-4 are truncated to 1 and -7/4 and 7/-4 are truncated to -1.

// Integer division with rounding to the nearest integer. Half-integer values are rounded away from 0 unless otherwise specified. For example 3//2 is rounded to 2, and -3//2 is rounded to -2.

DIV Integer division with truncation of the result towards $-\infty$.

% Modulus operator. Defined only for positive numbers.

Sign() Sign(x) = 1 x > 00 x == 0-1 x < 0

NINT () Nearest integer operator. Returns the nearest integer value to the real-valued argument. Half-integer values are rounded away from 0.

sin Sine.

cos Cosine.

exp Exponential.

√ Square root.

log₁₀ Logarithm to base ten.

loge Logarithm to base e.

3.5.3 Logical operators

| Logical OR.

&& Logical AND.

Logical NOT.

3.5.4 Relational operators

> Greater than.

 \geq Greater than or equal to.

< Less than.

 \leq Less than or equal to.

== Equal to.

!= Not equal to.

max [,...,] The maximum value in the argument list.

min [,...,] The minimum value in the argument list.

3.5.5 Bitwise operators

& AND.

OR.

>> Shift right with sign extension.

Shift left with 0 fill.

3.5.6 Assignment

Assignment operator.

3.5.7 Mnemonics

The following mnemonics are defined to describe the different data types used in the coded bit stream.

bslbf

Bit string, left bit first, where "left" is the order in which bit strings are written in the Standard. Bit strings are written as a string of 1s and 0s within single quote marks, e.g. '1000 0001'. Blanks within a bit string are for ease of

reading and have no significance.

uimsbf

Unsigned integer, most significant bit first.

The byte order of multi-byte words is most significant byte first.

3.5.8 Constants

 π 3.14159265359...

e 2.71828182845...

3.5.9 Method of describing bit stream syntax

Each data item in the coded bit stream described below is in bold type. It is described by its name, its length in bits, and a mnemonic for its type and order of transmission.

The action caused by a decoded data element in a bit stream depends on the value of that data element and on data elements previously decoded. The decoding of the data elements and definition of the state variables used in their decoding are described in the clauses containing the semantic description of the syntax. The following constructs are used to express the conditions when data elements are present, and are in normal type.

Note this syntax uses the "C" code convention that a variable or expression evaluating to a non-zero value is equivalent to a condition that is true.

```
while (condition) {
                                If the condition is true, then the group of data elements
                                occurs next in the data stream. This repeats until the
    data_element
                                condition is not true.
}
do {
                                The data element always occurs at least once. The data
                                element is repeated until the condition is not true.
    data_element
while (condition)
if (condition) {
                                If the condition is true, then the first group of data
    data element
                                elements occurs next in the data stream.
}
else {
                                If the condition is not true, then the second group of data
                                elements occurs next in the data stream.
    data_element
}
for (i = 0; i < n; i++) {
                                The group of data elements occurs n times. Conditional
                                constructs within the group of data elements may depend
    data_element
                                on the value of the loop control variable i, which is set to
}
                                zero for the first occurrence, incremented to 1 for the
                                second occurrence, and so forth.
```

As noted, the group of data elements may contain nested conditional constructs. For compactness, the {} are omitted when only one data element follows.

data alamant () is an amount data. The mountain of data

data_element []	elements is indicated by the context.
data_element [n]	data_element [n] is the n+1th element of an array of data.
data_element [m][n]	data_element [m][n] is the m+1,n+1 th element of a two-dimensional array of data.
data_element [i][m][n]	data_element [l][m][n] is the l+1,m+1,n+1 th element of a three-dimensional array of data.
data_element [mn]	data_element [mn] is the inclusive range of bits between bit m and bit n in the data_element.

Decoders must include a means to look for start codes and sync bytes (transport stream) in order to begin decoding correctly, and to identify errors, erasures or insertions

while decoding. The methods to identify these situations, and the actions to be taken, are not standardized.

3.5.9.1 Definition of bytealigned function

The function bytealigned() returns 1 if the current position is on a byte boundary; that is, the next bit in the bit stream is the first bit in a byte. Otherwise it returns 0.

3.5.9.2 Definition of nextbits function

The function nextbits() permits comparison of a bit string with the next bits to be decoded in the bit stream.

3.5.9.3 Definition of next start code function

The next_start_code() function removes any zero bit and zero byte stuffing and locates the next start code.

This function checks whether the current position is byte-aligned. If it is not, 0 stuffing bits are present. After that any number of 0 bytes may be present before the start-code. Therefore start-codes are always byte-aligned and may be preceded by any number of 0 stuffing bits.

Table 3.1 Next Start Code

4. BACKGROUND

4.1 Advanced Television Systems Committee (ATSC)

The Advanced Television Systems Committee, chaired by James C. McKinney, was formed by the member organizations of the Joint Committee on InterSociety Coordination (JCIC)¹ for the purpose of exploring the need for and, where appropriate, to coordinate development of the documentation of Advanced Television Systems. Documentation is understood to include voluntary technical standards, recommended practices, and engineering guidelines.

¹ The JCIC is presently composed of: the Electronic Industries Association (EIA), the Institute of Electrical and Electronics Engineers (IEEE), the National Association of Broadcasters (NAB), the National Cable Television Association (NCTA), and the Society of Motion Picture and Television Engineers (SMPTE).